

PROBASE

IMPACTA REGUPOL

Acoustic Rubber Underlayment

Acoustical Underlayment for Floated or Glue Down Engineered Hardwood




ProBase Benefits

- Sound reducing underlayment for floated or glue down engineered hardwood & laminate flooring
- Easy & fast to install, reduces installation time
- Excellent for lightweight wood construction, will help reduce airborne noise due to it's weight &
- Economically priced, roll size 4' x 25' & 4' x 50'
- Environmentally friendly, made from recycled tires using 92% post consumer recycled content

Impacta-Regupol ProBase floor underlayment is made from recycled rubber tires. ProBase is used under floated or glue down laminate or engineered hardwood flooring. ProBase is excellent for use in lightweight wood frame construction due to its weight & mass. ProBase is readily available in stock thickness of 3mm, 6mm and 12 mm with custom thicknesses from 1mm to 17mm.


Acoustical Testing

 92% post consumer recycled content

Model	Application	Roll Size / SF / Weight roll	IIC Wood Frame Const (floated hardwood)	Δ IIC 6" concrete slab (floated hardwood)	Δ IIC 6" concrete slab (glue down hardwood)	IIC 6" concrete slab with ceiling below (glue down hardwood)
ProBase 3mm	Perfect for concrete slab for floated or glue down hardwood	4' x 50' 200 sf roll 100 lbs roll	IIC 57	Δ IIC 21	Δ IIC 19	IIC 60
ProBase 6mm	Perfect for lightweight wood frame construction, weighs 1 lb per sq ft, helps reduce both airborne & impact noise	4' x 25' 100 sf roll 100 lbs roll	IIC 57	Δ IIC 22	N/A	N/A
ProBase 12mm	Perfect for lightweight wood frame construction, weighs 2 lb per sq ft, helps reduce both airborne & impact noise	4' x 25' 100 sf roll 200 lbs roll	IIC 57	Δ IIC 23	N/A	N/A

Other ProBase Models

PROBASE TILE

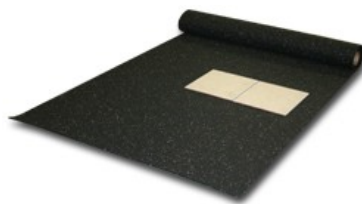

PROBASE CURVE



IMPACTA
Acoustical Floor Underlayments

50 H.P. Almgren Drive | Agawam, MA 01001
Tel. 800.569.1294 | Fax 413.789.2248
www.impacta-regupol.com | impacta@soundseal.com

 **SOUND SEAL®**